


RTD CONNECTION HEAD

STYLE RIP

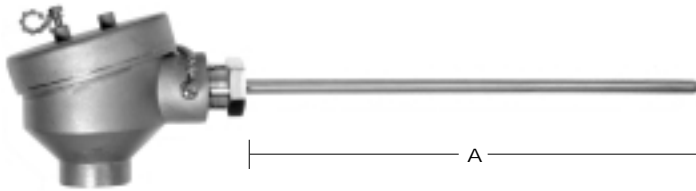

- Stainless steel sheath
- Choice of insulation determines the maximum temperature at hot end
- 100 Ω , TCR = .00385 $\Omega/\Omega/^\circ\text{C}$ DIN curve
- Connection heads are gasketed to seal against moisture, dust and corrosive or hostile atmospheres
- Screw covers are attached to body with a plated chain
- Covers have lugs for tightening or loosening with a screwdriver or wrench
- Connection heads are available in die-cast aluminum, stainless steel, polypropylene and nylon in standard and miniature sizes

ORDERING INFORMATION

R	I	P	1	2	-	3	4	4	4	-	5	6	6	6	7	-	8
----------	----------	----------	----------	----------	---	----------	----------	----------	----------	---	----------	----------	----------	----------	----------	---	----------

To create an ordering code fill in the boxes above with the appropriate number and/or letter from the corresponding box below.

Box 1: Element Class

A = $\pm 0.06\%$ at 32°F (0°C), Special
 B = $\pm 0.12\%$ at 32°F (0°C), Standard

Box 2: Number of Elements

1 = Single
 2 = Dual (not available with 1/8" sheath)

Box 3: Number of Leads per Element

2 = 2-Wire Circuit
 3 = 3-Wire Circuit
 4 = 4-Wire Circuit (not available with 1/8" sheath)

Box 4: Sheath O.D. enter 3 digit code

125 = 1/8"
 188 = 3/16"
 250 = 1/4"

Box 5: Sheath Material

A = 304 SS
 B = 316 SS

Box 6: Sheath Length "A" fill in measurement desired

Whole inches: 01" to 99" (Lengths over 99" consult TTI)

Fractions: A = No fraction
 B = 1/8"
 C = 1/4"
 D = 3/8"
 E = 1/2"
 F = 5/8"
 G = 3/4"
 H = 7/8"

Example: For a 10-1/4" sheath length, enter 10C into the corresponding boxes above.

Box 7: Lead Wire Insulation

G = Fiberglass (900°F/482°C)
 T = Teflon (400°F/204°C)

Box 8: Connection Head*

1 = Aluminum Screw Top
 2 = Aluminum Screw Top Explosion-Proof
 3 = Aluminum Flip Top
 4 = 316 SS Screw Top
 5 = 316 SS Screw Top Explosion-Proof
 6 = FDA Approved White Polypropylene

* Process and conduit opening 1/2" NPT unless otherwise noted.